

APPROVED BY: _____

DATE APPROVED: _____

CPM-1 (Insulated) (1-Piece) Metal Bldg. Roof Curb

STANDARD FEATURES

1. 18Ga. Prime Galvalume Steel Construction
2. Corners Mitered and Welded Watertight.
3. Curbs Prime Painted after Fabrication.
4. Water Cricket.
5. 8" Minimum Height.
6. Loose Clips.
7. Internal Angle Reinforcing.
8. 1-1/2" Thick, 3# Density Fiberglass Insulation.

OPTIONS:

- 1.
- 2.
- 3.
- 4.

PROJECT NAME: _____


CITY, STATE: _____

CUSTOMER: _____

JOB NUMBER: _____




Note: The Front, Rear, and Side Flanges Fit Over the Roof Panel

CLIPS TO MATCH THIS ROOF PANEL _____

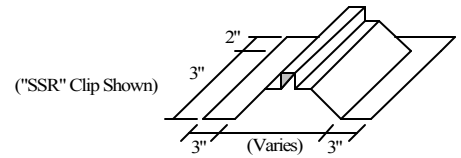

Number of Clips Per Curb _____

LOOSE CLIPS

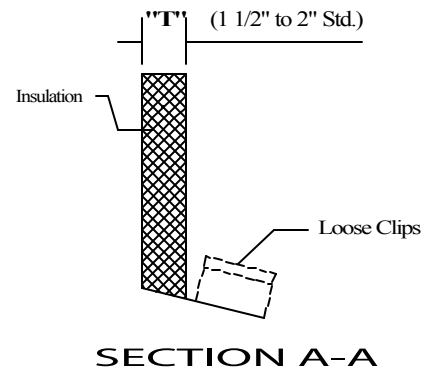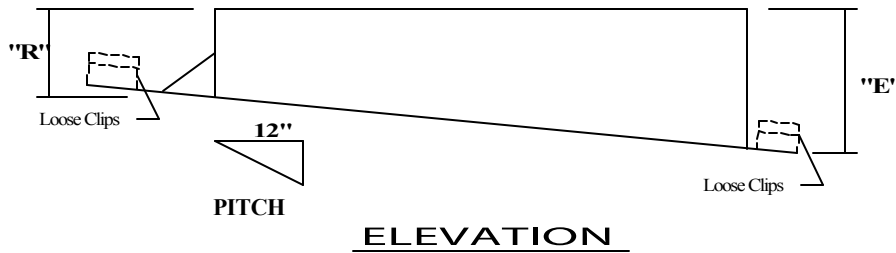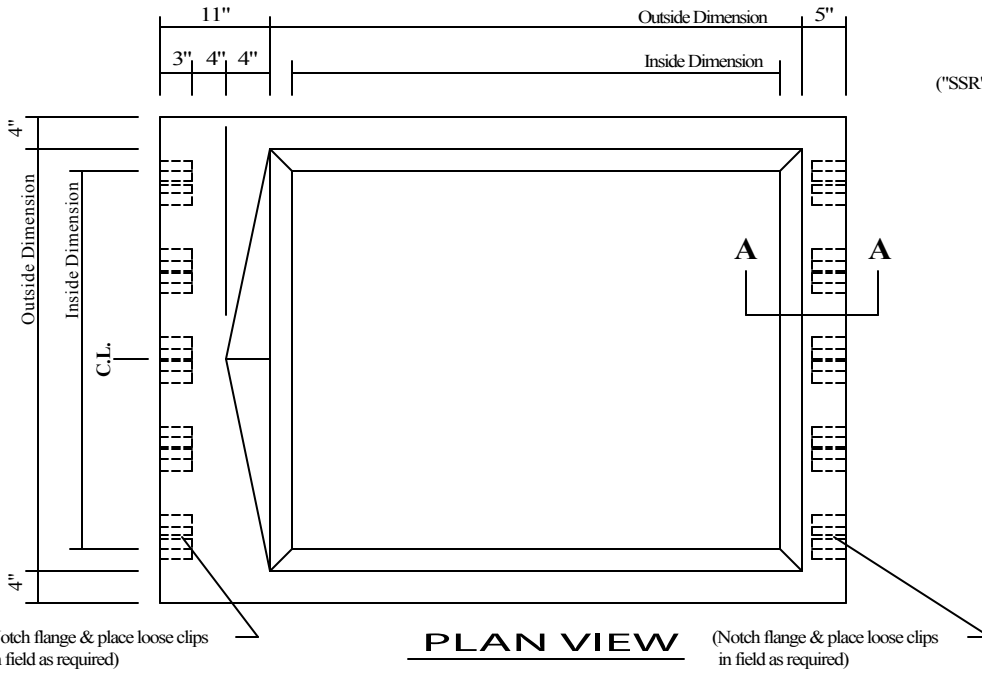

QUANTITY	INSIDE DIMENSION	OUTSIDE DIMENSION	"R"	"E"	"T"	TAG
	X	X				