

APPROVED BY: _____

DATE APPROVED: _____

CPM-3 (Insulated) Metal Bldg. Roof Curb

STANDARD FEATURES

1. 18Ga. Prime Galvalume Steel Construction
2. Corners Mitered and Welded Watertight.
3. Curbs Prime Painted after Fabrication.
4. Water Cricket.
5. 8" Minimum Height.
6. Internal Angle Reinforcing.
7. 1-1/2" Thick, 3# Density Fiberglass.

OPTIONS:

- 1.
- 2.
- 3.
- 4.

PROJECT NAME: _____


CITY, STATE: _____


CUSTOMER: _____

JOB NUMBER: _____


Note: The Front, Rear and Side Flanges Fit Over the Roof Panel

CLIPS TO MATCH THIS ROOF PANEL _____

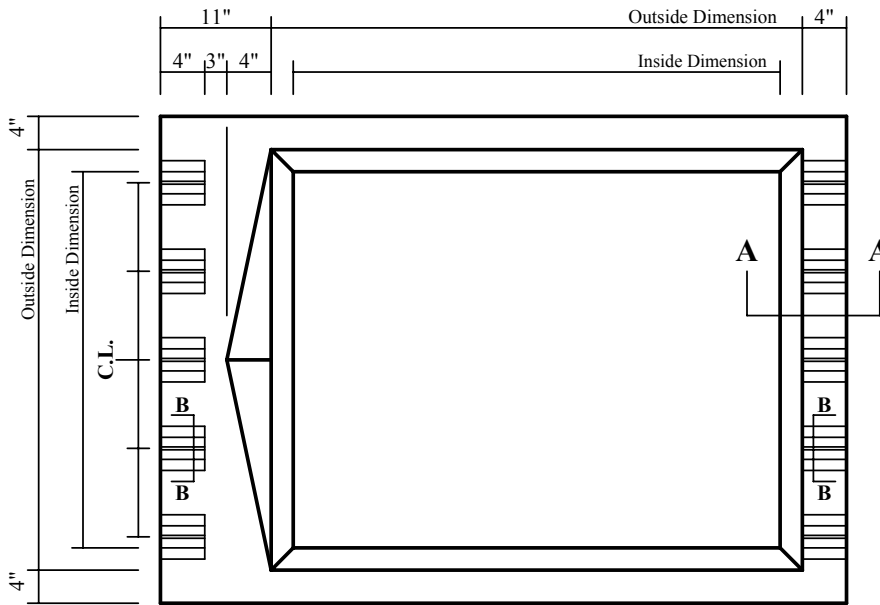


Number of Upper Clips Per Curb _____ Number of Lower Clips Per Curb _____

<input type="checkbox"/> "R" PANEL <input type="checkbox"/> "SSR" PANEL <input type="checkbox"/> "T" PANEL
<u>SECTION B-B</u>

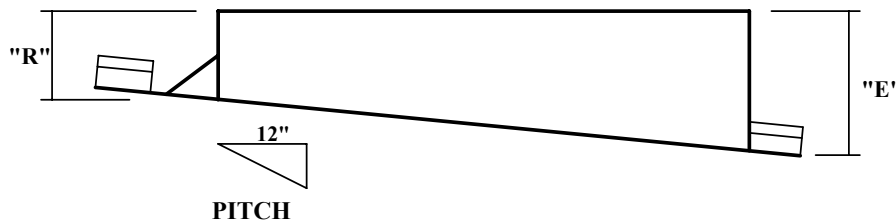PLAN VIEW

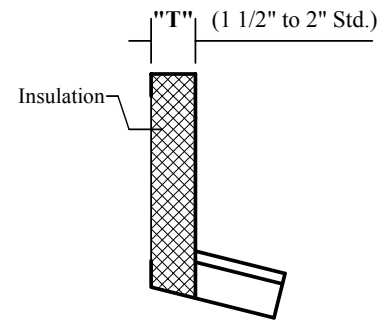

ELEVATION



SECTION A-A

QUANTITY	INSIDE DIMENSION	OUTSIDE DIMENSION	"R"	"E"	"T"	TAG
	x	x				